


Araldite®

Encapsulants for battery and power electronics

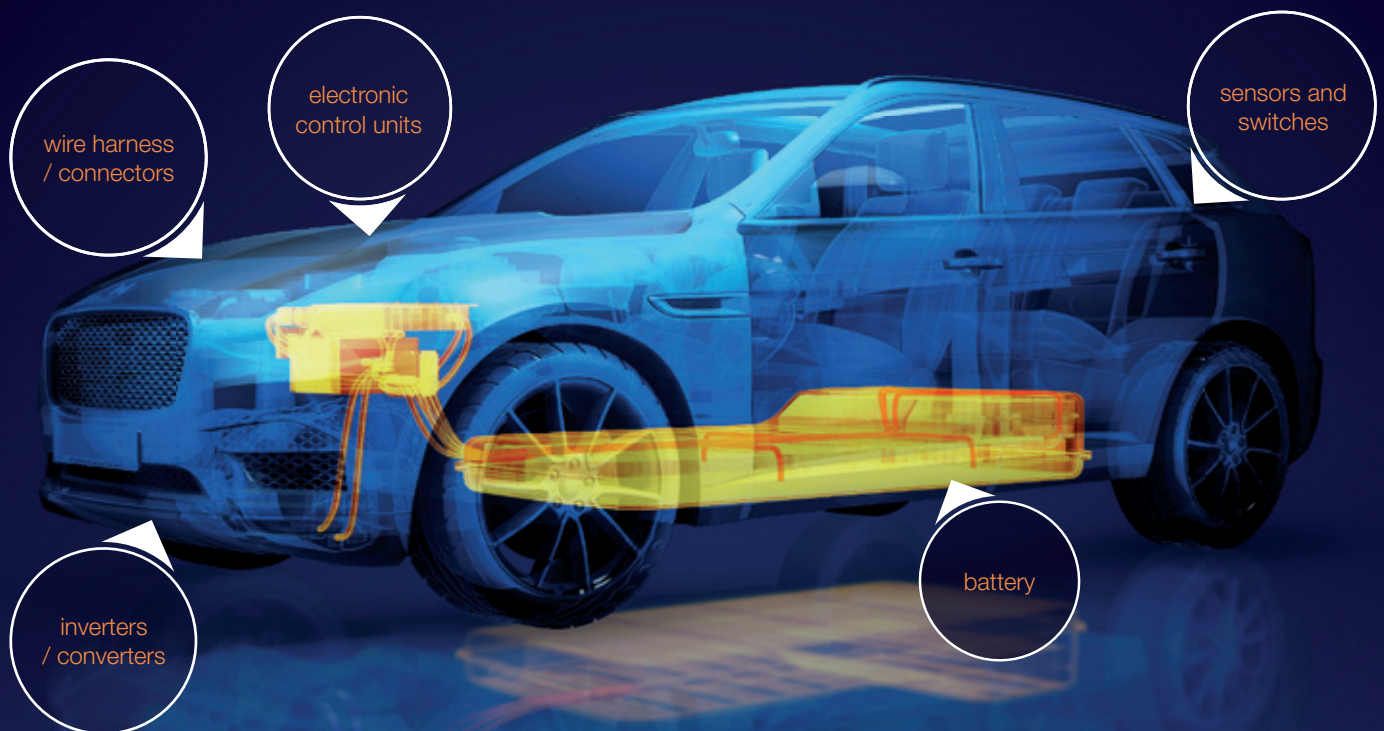

Araldite® encapsulants protect sensitive devices, improve thermal management and meet new temperature resistance requirements

Araldite® encapsulants increase performance of various electronic parts in the electrified powertrain

Key features

- > High flexibility and crack resistance
- > High thermal conductivity
- > Excellent thermal endurance
- > High voltage resistance
- > Excellent chemical resistance
- > Long-lasting and reliable sealing

Araldite®

Encapsulants for battery and power electronics

Encapsulant for battery Araldite® CW 1312 / Aradur® HY 1300	Encapsulant for power electronics Araldite® CW 1302 / Aradur® HY 1300
Glass transition temperature (Tg) 21°C	Glass transition temperature (Tg) 75°C
Thermal conductivity 1.1 W/(m·K)	Thermal conductivity 0.9 W/(m·K)
Increased heat conductivity. Flammability certification UL 94 V-0 (3.2 mm). Low curing temperature and Tg enabling low thermally induced stress	Good heat conductivity and thermal endurance (Class H). Flammability certification UL 94 V-0 (3.0 mm) and HB (1.5 mm).

Encapsulant for power electronics Araldite® CW 1195 / Aradur® HW 1196	Encapsulant for power electronics Araldite® CW 30039
Glass transition temperature (Tg) 140°C	Glass transition temperature (Tg) 184°C
Thermal conductivity 0.7 W/(m·K)	Thermal conductivity 0.7 W/(m·K)
Fast fill and cure times enabling fast processing. Low coefficient of thermal expansion (28·10 ⁻⁶ 1/K). Flammability certification UL 94 V-0 (6.0 mm) and thermal endurance (Class H).	Minimum thermal expansion of 20·10 ⁻⁶ 1/K up to 184°C. Toughened resin with reinforcing fillers for superior crack and thermoshock resistance. Monocomponent with strong viscosity drop above 60°C for fast processing.

Learn more on www.huntsman-emobility.com

For any other information, please send an e-mail to advanced_materials@huntsman.com

Europe, Middle East, Africa & India +41 61 299 1111 Asia Pacific +86 21 3357 2888 Americas +1 888 564 9318



Registered for
REACH

Legal information All trademarks mentioned are either property of or licensed to Huntsman Corporation or an affiliate thereof in one or more, but not all, countries. Sales of the product described herein ("Product") are subject to the general terms and conditions of sale of either Huntsman Advanced Materials LLC, or its appropriate affiliate including without limitation Huntsman Advanced Materials (Europe) BVBA, Huntsman Advanced Materials Americas Inc., or Huntsman Advanced Materials (Hong Kong) Ltd. or Huntsman Advanced Materials (Guangdong) Ltd. ("Huntsman"). The following supercedes Buyer's documents. While the information and recommendations included in this publication are, to the best of Huntsman's knowledge, accurate as of the date of publication, NOTHING CONTAINED HEREIN IS TO BE CONSTRUED AS A REPRESENTATION OR WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHTS, OR WARRANTIES AS TO QUALITY OR CORRESPONDENCE WITH PRIOR DESCRIPTION OR SAMPLE, AND THE BUYER ASSUMES ALL RISK AND LIABILITY WHATSOEVER RESULTING FROM THE USE OF SUCH PRODUCT, WHETHER USED SINGLY OR IN COMBINATION WITH OTHER SUBSTANCES. No statements or recommendations made herein are to be construed as a representation about the suitability of any Product for the particular application of Buyer or user or as an inducement to infringe any patent or other intellectual property right. Data and results are based on controlled conditions and/or lab work. Buyer is responsible to determine the applicability of such information and recommendations and the suitability of any Product for its own particular purpose, and to ensure that its intended use of the Product does not infringe any intellectual property rights. The Product may be or become hazardous. Buyer should (i) obtain Material Safety Data Sheets and Technical Data Sheets from Huntsman containing detailed information on Product hazards and toxicity, together with proper shipping, handling and storage procedures for the Product, (ii) take all steps necessary to adequately inform, warn and familiarize its employees, agents, direct and in direct customers and contractors who may handle or be exposed to the Product of all hazards pertaining to and proper procedures for safe handling, use, storage, transportation and disposal of and exposure to the Product and (iii) comply with and ensure that its employees, agents, direct and indirect customers and contractors who may handle or be exposed to the Product comply with all safety information contained in the applicable Material Safety Data Sheets, Technical Data Sheets or other instructions provided by Huntsman and all applicable laws, regulations and standards relating to the handling, use, storage, distribution and disposal of and exposure to the Product. Please note that products may differ from country to country. If you have any queries, kindly contact your local Huntsman representative.

© 2018 Huntsman Corporation. All rights reserved. Ref. No. AdMat Araldite® Encapsulants for battery and power electronics_06.18_EN_UE