

Marine Adhesives

Application: Gearbox overhaul



Permabond adhesives are ideal for bonding gears to shafts, repairing and replacing spun bearings, bonding bushes and sealing and gasketing gear box housings.

Benefits of Permabond anaerobic sealants:

- Available in a range of viscosities to suit component size, diameter and fit
- Help prevent metal fretting
- Machining tolerances can be relaxed (no more interference or shrink fits)
- Help lubricate parts making the assembly process much easier
- Permabond gasketmakers are ideal for making a whole variety of different shaped gaskets - one bottle can seal all.
- Excellent resistance to water, oil, petrol and other chemicals. High temperature resistant products also available.

Adhesive used: Permabond A1046 (for bearings and gears to shaft). Permabond MH196 for gasketing.

Permabond offers a range of adhesive technologies suitable for use in shipbuilding, repair and maintenance.



Threadlocking Pipesecaling

Application: Reinforcing Superstructure

Severe environmental conditions and stress exertion on superstructures can cause cracks to appear around high stress areas (such as corners of doorways and window frames). Cracks can be filled and a metal plate bonded across to strengthen such problem areas.

- High viscosity, high strength adhesive with good adhesion
- Easy to apply, good gap fill
- Rapid cure speed as plates normally cannot be clamped in place during cure
- Resistant to salt spray
- High shear and peel strength to cope with high stress exerted, particularly during stormy conditions when the ship lurches.

Adhesive used: Permabond TA4300




Application: Rudder bushing repair



This particular customer was unable to weld cast iron to steel and decided to bond the rudder bushing in place instead. Less accurate machining of parts was required as the high viscosity adhesive was able to take up the slack fit between parts.

- Excellent resistance to salt water
- 100% seal prevents corrosion
- Much easier than welding

Adhesive used: Permabond A134

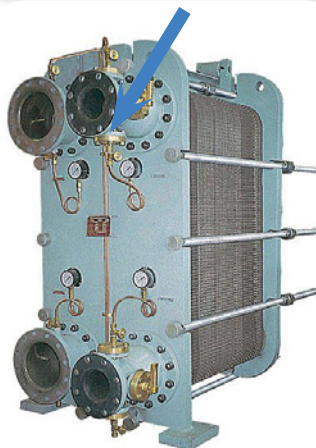

Application: Flange sealing on ship heat exchanger

Sealing flanges and bolt holes on a ship's heat exchanger.

- Excellent resistance to coolant fluid
- 100% seal prevents leaking
- No bedding in (unlike pre-formed gaskets) so less routine maintenance required.
- High temperature resistance - up to 200°C

Adhesive used: Permabond MH196

Product selector

Features	Typical Applications	Cure method	Viscosity (mPa.s) cP	Gap fill (mm) in	Handling time	Max. shear strength steel (MPa) psi	Temperature range (°C) °F
Permabond A1042 Anaerobic threadlocker - prevents vibration loosening, corrosion, leakage	Threadlocking and sealing hydraulics	Anaerobic cure	8,000	(0.12) 0.005	5 minutes	(12) 1700	(-55 to +150) -65 to +300
Permabond HM129 Anaerobic threadlocker - can be used on oily / contaminated parts	Threadlocking nuts and bolts	Anaerobic cure	500	(0.15) 0.006	10 minutes	(17) 2500	(-55 to +150) -65 to +300
Permabond MH196 High viscosity anaerobic sealant for making formed-in-situ gaskets and for sealing flanges and bolt holes	Gasketing and flange sealing	Anaerobic cure	150,000	(0.5) 0.02	15 minutes	(10) 1500	(-55 to +200) -65 to +390
Permabond A131 Pipe sealant - suitable for sealing fuel, water, sprinkler and heating pipework	Pipesealing	Anaerobic cure	40,000	(0.5) 0.02	45 minutes	(6) 900	(-55 to +150) -65 to +300
Permabond A1046 Toughened, rapid curing high strength retaining adhesive	Bonding gears to shafts, bearings into housings. Also ideal for sealing air conditioning refrigerant pipework	Anaerobic cure	9,000	(0.25) 0.01	5 minutes	(25) 3600	(-55 to +150) -65 to +300
Permabond A134 High viscosity retaining adhesive, suitable for bonding larger parts	Bonding gears to shafts, bearings into housings	Anaerobic cure	70,000	(0.5) 0.02	15 minutes	(21) 3000	(-55 to +150) -65 to +300
Permabond 2011 General purpose instant bonding gel	Repairing interior trim, bonding rubber mat edges to prevent trip hazards	Moisture cure	Gel	(0.5) 0.02	5-10 seconds	(24) 3500	(-55 to +80) -65 to +175
Permabond TA4300 Adhesive for structural bonding	Repair of ship's superstructure - metal bonding	Resin & hardener (room temperature cure)	Paste	(2) 0.08	5-10 minutes	(22) 3200	(-55 to +120) -65 to +250
Permabond ET538 2-part epoxy for bonding of wood, fibreglass, composites, metal etc. Excellent salt water resistance.	Hull, mast and deck construction & repair. Filling gaps and cracks.	Resin & hardener (room temperature cure)	Paste	(5) 0.2	3-4 hours	(20) 2900	(-55 to +80) -65 to +175

If you can't see the exact product you are looking for, or need more in depth technical information, Permabond's technical team would be more than happy to help.

Contact Permabond

www.permabond.com

US Helpline - 800-640-7599

• **UK - 0800 975 9800**

• **Asia + 86 21 5773 4913**

• **General Enquiries +44(0)1962 711661**

• **Deutschland 0800 101 3177**

• **France 0805 111 388**

info.europe@permabond.com

info.americas@permabond.com

info.asia@permabond.com

Permabond Worldwide

Wherever your manufacturing or R&D site may be located, Permabond representatives can be called upon to assist you. We have an extensive network of trained distributors worldwide.



Permabond's sales engineers are available to assess your production line and find the best possible turnkey adhesive solution that will result in production efficiencies.

The experienced team of Permabond chemists is on hand to help you with custom formulations and fulfilling your technical data requests.



Permabond®
Engineering Adhesives

The information given and the recommendations made herein are based on our experience and are believed to be accurate. No guarantee as to, or responsibility for, their accuracy can be given or accepted, however, and no statement herein is to be treated as a representation or warranty. In every case we urge and recommend that purchasers, before using any product, make their own tests to determine, to their own satisfaction, its suitability for their particular purposes under their own operating conditions.