



Product Information

DOWSIL™ TC-4605 and DOWSIL™ TC-4605 HLV Thermally Conductive Encapsulants



Imagine



Thermally Conductive Encapsulant

Dow’s versatile portfolio of thermally conductive silicone encapsulants offers solutions for a broad range of automotive PCB (system) assembly, from standard and advanced assemblies to next-generation applications that demand ever-greater integration and higher power densities.

DOWSIL™ TC-4605 Thermally Conductive Encapsulant

DOWSIL™ TC-4605 Thermally Conductive Encapsulant is two-part Silicone Elastomer, heat cure for manufacturing flexibility. It is 1 W/m•K thermally conductive encapsulant/pottant for PCB protection from different enviromental conditions and thermal management for devices. It can act as a buffer for wire and components because of its soft characteristic.

DOWSIL™ TC-4605 HLV Thermally Conductive Encapsulant




DOWSIL™ TC-4605 HLV Thermally Conductive Encapsulants a two-part Silicone Elastomer, heat cure for manufacturing flexibility. It is 1 W/m•K thermally conductive encapsulant/pottant for PCB protection from different enviromental conditions and thermal management for devices. Its lower viscosity compared to 1 W/m•K thermal conductivity provides better workability and productivity. This product also gives you better mechanical properties and adhesion on aluminum for your application.

Material Properties




Property	DOWSIL™ TC-4605 Thermally Conductive Encapsulant	DOWSIL™ TC-4605 HLV Thermally Conductive Encapsulant
Color	Gray	Gray
Form	Two-part, Heat-cure	Two-part, Heat-cure
Mix ratio	1:1	1:1
Viscosity, Part A	3100 cP	1600 cP
Viscosity, Part B	2500 cP	1400 cP
Viscosity, mixed	2900 cP	1900 cP
Durometer, Shore A	30	60
Specific gravity	1.67 g/cm³	1.67 g/cm³
Pot life	135 min	130 min
Thermal conductivity	1.00 W/m•K	1.00 W/m•K
Adhesion to aluminum (anodized)	110 psi	220 psi
Tensile strength	110 psi	375
Elongation	100%	95%
Shelf life	9 months	6 months
Dielectric strength	21 kV/mm	24 kV/mm
Volume resistivity	3.30E+14 Ohm•cm	1.08E+15 Ohm•cm
Heat cure time	1 hour @ 120°C	1 hour @ 120°C



Performance Data for DOWSIL™ TC-4605
Thermally Conductive Encapsulant

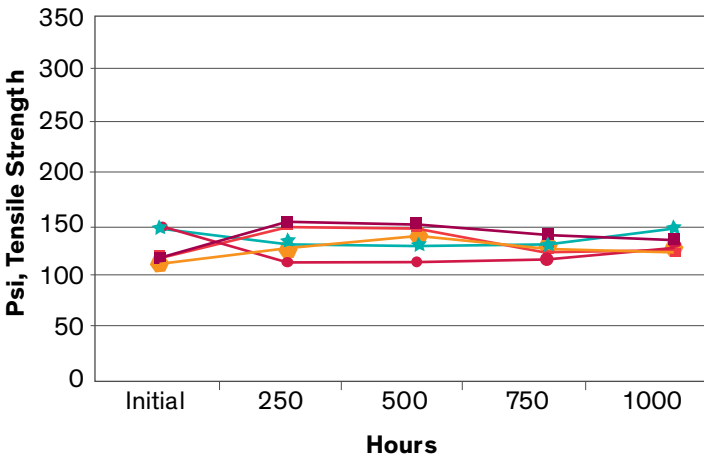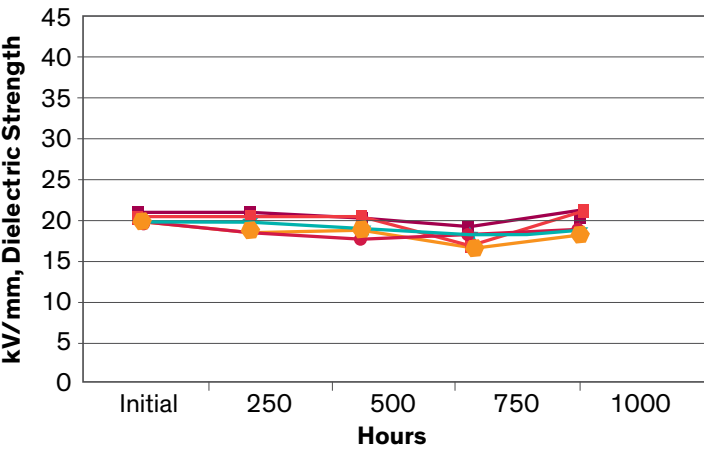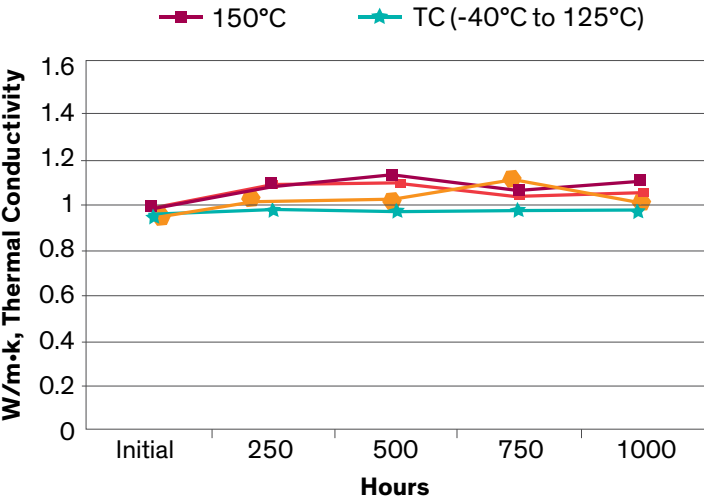

Performance Data for DOWSIL™ TC-4605 HL
Thermally Conductive Encapsulant

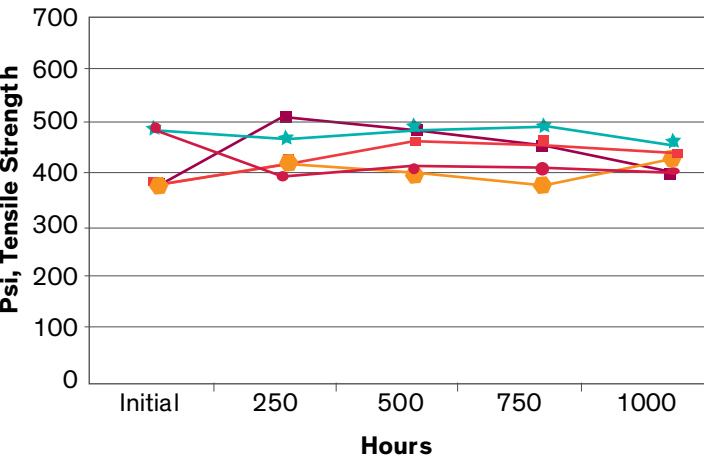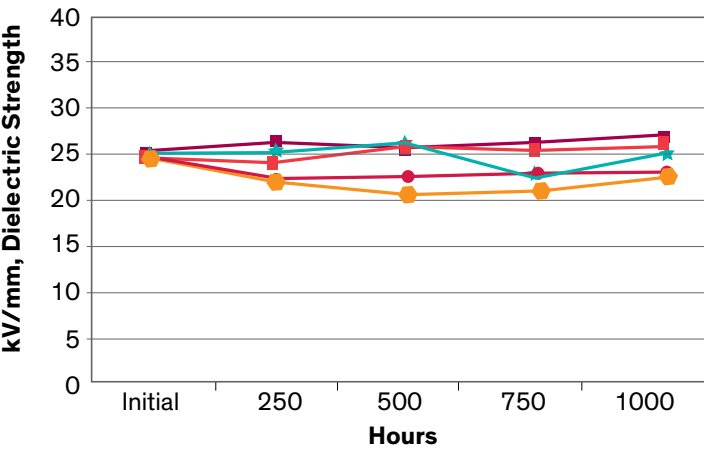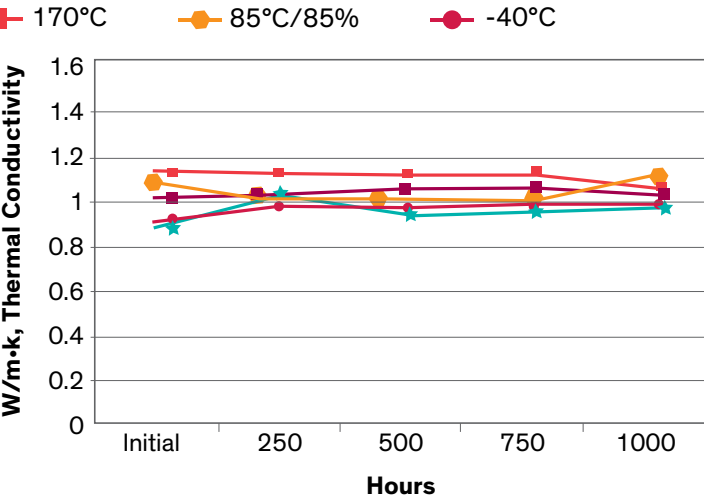

One Company, Many Transportation Solutions

DOWSIL™ TC-4605 Thermally Conductive Encapsulant and DOWSIL™ TC-4605 HLV Thermally Conductive Encapsulant are available from Dow worldwide. Specially designed to address the thermal challenges of today's most demanding device assembly, these high-performance materials round out Dow's broad and expanding portfolio of advanced solutions for thermal management.

Learn More

We bring more than just an industry-leading portfolio of advanced silicone-based materials. As your dedicated innovation leader, we bring proven process and application expertise, a network of technical experts, a reliable global supply base and world-class customer service.

To find out how we can support your applications, visit consumer.dow.com/pcb.

Image: dow_40789310509

HANDLING PRECAUTIONS

PRODUCT SAFETY INFORMATION REQUIRED FOR SAFE USE IS NOT INCLUDED IN THIS DOCUMENT. BEFORE HANDLING, READ PRODUCT AND SAFETY DATA SHEETS AND CONTAINER LABELS FOR SAFE USE, PHYSICAL AND HEALTH HAZARD INFORMATION. THE SAFETY DATA SHEET IS AVAILABLE ON THE DOW WEBSITE AT WWW.CONSUMER.DOW.COM, OR FROM YOUR DOW SALES APPLICATION ENGINEER, OR DISTRIBUTOR, OR BY CALLING DOW CUSTOMER SERVICE.

LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that our products are safe, effective and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow's sole warranty is that our products will meet the sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DOW SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.

DOW DISCLAIMS LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.

®™ Trademark of The Dow Chemical Company ("Dow") or an affiliated company of Dow

© 2019 The Dow Chemical Company. All rights reserved.

S91209/E26340

Form No. 11-3474-01 A S2D